


# NAiS

**HF (High Function) Type  
[1-Channel (Form A) Type]**

# PhotoMOS RELAYS

## FEATURES

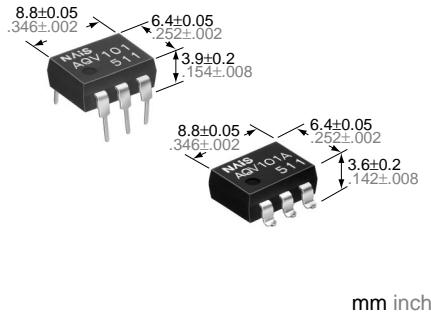

### 1. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

### 2. Control with low-level input signals

### 3. Controls various types of loads such as relays, motors, lamps and solenoids.

### 4. Optical coupling for extremely high isolation

Unlike mechanical relays, the PhotoMOS relay combines LED and optoelectronic device to transfer signals using light for extremely high isolation.

### 5. Eliminates the need for a counter electromotive force protection diode in the drive circuits on the input side

### 6. Stable on resistance

### 7. Low-level off state leakage current

### 8. Eliminates the need for a power supply to drive the power MOSFET

A power supply used to drive the power MOSFET is unnecessary because of the built-in optoelectronic device. This results in easy circuit design and small PC board area.

### 9. Low thermal electromotive force (Approx. 1 μV)

## TYPICAL APPLICATIONS

- High-speed inspection machines
- Telephone equipment
- Data communication equipment
- Computer

## TYPES

### 1. DC type (AQV10 types)

Output rating*		Part No.				Packing quantity	
		Through hole terminal		Surface-mount terminal			
Load voltage	Load current	Tube packing style		Tape and reel packing style		Tube	Tape and reel
		Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side	Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side		
40 V	700 mA	AQV101	AQV101A	AQV101AX	AQV101AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs
60 V	600 mA	AQV102	AQV102A	AQV102AX	AQV102AZ		
250 V	300 mA	AQV103	AQV103A	AQV103AX	AQV103AZ		
400 V	180 mA	AQV104	AQV104A	AQV104AX	AQV104AZ		

\*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

### 2. AC/DC type (AQV20 types)

Output rating*		Part No.				Packing quantity	
		Through hole terminal		Surface-mount terminal			
Load voltage	Load current	Tube packing style		Tape and reel packing style		Tube	Tape and reel
		Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side	Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side		
40 V	500 mA	AQV201	AQV201A	AQV201AX	AQV201AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs
60 V	400 mA	AQV202	AQV202A	AQV202AX	AQV202AZ		
250 V	200 mA	AQV203	AQV203A	AQV203AX	AQV203AZ		
400 V	150 mA	AQV204	AQV204A	AQV204AX	AQV204AZ		

\*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

# AQV10○, 20○

## RATING

### 1. DC type (AQV10 types)

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)


	Item	Symbol	AQV101(A)	AQV102(A)	AQV103(A)	AQV104(A)	Remarks
Input	LED forward current	$I_F$		50 mA			
	LED reverse voltage	$V_R$		6 V			
	Peak forward current	$I_{FP}$		1 A			$f = 100 \text{ Hz, Duty factor} = 0.1\%$
	Power dissipation	$P_{in}$		150 mW			
Output	Load voltage (DC)	$V_L$	40 V	60 V	250 V	400 V	
	Continuous load current (DC)	$I_L$	0.7 A	0.6 A	0.3 A	0.18 A	
	Peak load current	$I_{peak}$	1.8 A	1.5 A	0.6 A	0.5 A	100 ms (1 shot)
	Power dissipation	$P_{out}$		360 mW			
Total power dissipation		$P_T$		410 mW			
I/O isolation voltage		$V_{iso}$		1,500 V (AC)			
Temperature limits	Operating	$T_{opr}$		−40°C to +85°C	−40°F to +185°F		Non-condensing at low temperatures
	Storage	$T_{stg}$		−40°C to +100°C	−40°F to +212°F		

2) Electrical characteristics (Ambient temperature: 25°C 77°F)

	Item	Symbol	AQV101(A)	AQV102(A)	AQV103(A)	AQV104(A)	Condition
Input	LED operate current	$I_{Fon}$		2.3 mA			$I_L = \text{Max.}$
				5 mA			
	LED turn off current	$I_{Foff}$		0.8 mA			$I_L = \text{Max.}$
				2.2 mA			
Output	LED dropout voltage	$V_F$		2.3 V			$I_F = 10 \text{ mA}$
				3 V			
	On resistance	$R_{on}$	0.3 Ω	0.37 Ω	2.7 Ω	6.3 Ω	$I_F = 10 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time
			0.5 Ω	0.7 Ω	4 Ω	8 Ω	
Transfer characteristics	Off state leakage current	Maximum	—		1 μA		$I_F = 0, V_L = \text{Max.}$
	Switching speed	$T_{on}$	0.23 ms	0.22 ms	0.13 ms	0.09 ms	$I_F = 10 \text{ mA}$ $I_L = \text{Max.}$
					1 ms		
	I/O capacitance	$T_{off}$	0.07 ms	0.07 ms	0.07 ms	0.08 ms	$I_F = 10 \text{ mA}$ $I_L = \text{Max.}$
					1 ms		
	Initial I/O isolation resistance	Minimum	$R_{iso}$		1,000 MΩ		$f = 1 \text{ MHz}$

Note: Recommendable LED forward current  $I_F = 5$  to 10 mA.

\*Turn on/Turn off time

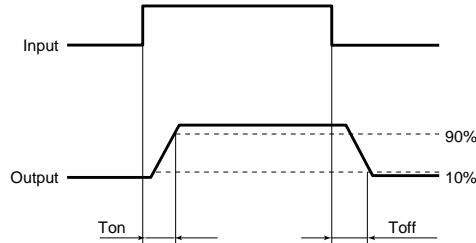

**2. AC/DC type (AQV20 types)**

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV201(A)	AQV202(A)	AQV203(A)	AQV204(A)	Remarks	
Input	LED forward current	I <sub>F</sub>		50 mA					
	LED reverse voltage	V <sub>R</sub>		6 V					
	Peak forward current	I <sub>FP</sub>		1 A				f = 100 Hz, Duty factor = 0.1%	
	Power dissipation	P <sub>in</sub>		150 mW					
Output	Load voltage (peak AC)	V <sub>L</sub>		40 V	60 V	250 V	400 V		
	Continuous load current	I <sub>L</sub>		A	0.5 A	0.4 A	0.2 A	0.15 A	
				B	0.7 A	0.6 A	0.3 A	0.18 A	
				C	1.0 A	0.8 A	0.4 A	0.25 A	
	Peak load current	I <sub>peak</sub>		1.8 A	1.5 A	0.6 A	0.5 A	A connection 100 ms (1 shot) V <sub>L</sub> = DC	
	Power dissipation	P <sub>out</sub>		360 mW					
Total power dissipation		P <sub>T</sub>		410 mW					
I/O isolation voltage		V <sub>iso</sub>		1,500 V AC					
Temperature limits	Operating	T <sub>opr</sub>		−40°C to +85°C		−40°F to +185°F		Non-condensing at low temperature	
	Storage	T <sub>stg</sub>		−40°C to +100°C		−40°F to +212°F			


## 2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection**	AQV201(A)	AQV202(A)	AQV203(A)	AQV204(A)	Remarks	
Input	LED operate current	Typical	I <sub>Fon</sub>	2.4 mA				I <sub>L</sub> = Max.	
		Maximum		5 mA					
	LED turn off current	Minimum		0.8 mA				I <sub>L</sub> = Max.	
		Typical		2.2 mA					
Output	LED dropout voltage	Typical	V <sub>F</sub>	2.3 V				I <sub>F</sub> = 10 mA	
		Maximum		3 V					
		Typical		0.6 Ω	0.74 Ω	5.5 Ω	12.4 Ω		
		Maximum		1 Ω	1.4 Ω	8 Ω	16 Ω		
	On resistance	Typical	R <sub>on</sub>	0.3 Ω	0.37 Ω	2.7 Ω	6.2 Ω	I <sub>F</sub> = 10 mA I <sub>L</sub> = Max. Within 1 s on time	
		Maximum		0.5 Ω	0.7 Ω	4 Ω	8 Ω		
Transfer characteristics	Switching speed	Typical	T <sub>on</sub>	0.15 Ω	0.18 Ω	1.4 Ω	3.1 Ω	I <sub>F</sub> = 10 mA I <sub>L</sub> = Max. Within 1 s on time	
		Maximum		0.25 Ω	0.35 Ω	2 Ω	4 Ω		
		Turn off time*	T <sub>off</sub>	—	1 ms				
	I/O capacitance	Typical	C <sub>iso</sub>	0.08 ms		0.07 ms	0.07 ms	I <sub>F</sub> = 10 mA I <sub>L</sub> = Max.	
		Maximum		1 ms					
	Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	—	1.3 pF				
				—	3 pF				
Initial I/O isolation resistance				—	1,000 MΩ		500 V DC		

Note: Recommendable LED forward current I<sub>F</sub> = 5 to 10 mA.

\*\*type of connection

\*Turn on/Turn off time

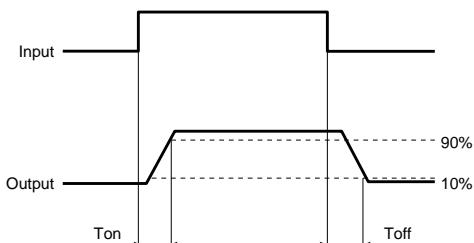


- For Dimensions, see Page 440.
- For Schematic and Wiring Diagrams, see Page 444.
- For Cautions for Use, see Page 449.

# AQV10○, 20○

## REFERENCE DATA

### 1.-1) Load current vs. ambient temperature characteristics (DC type)


Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

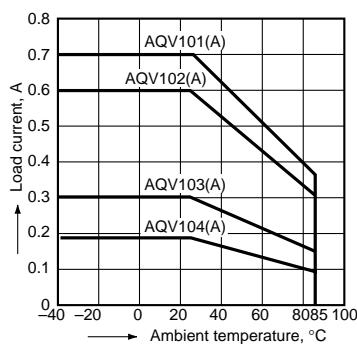

### 1.-2) Load current vs. ambient temperature characteristics (AC/DC type)


Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

Type of connection: A

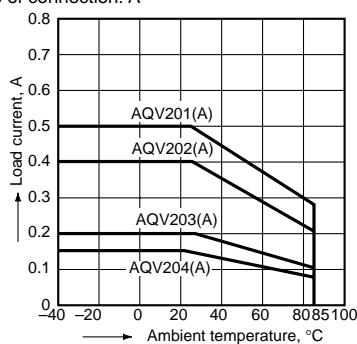


### 2.-1) On resistance vs. ambient temperature characteristics (DC type: AQV101, AQV102)

LED current: 10 mA;  
Continuous load current: Max. (DC)

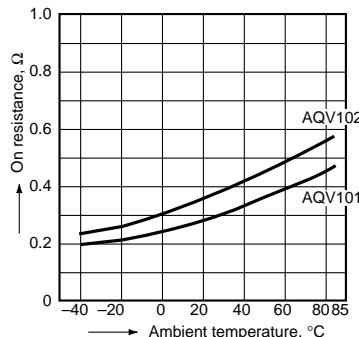


### 2.-2) On resistance vs. ambient temperature characteristics (DC type: AQV103, AQV104)

LED current: 10 mA;  
Continuous load current: Max. (DC)

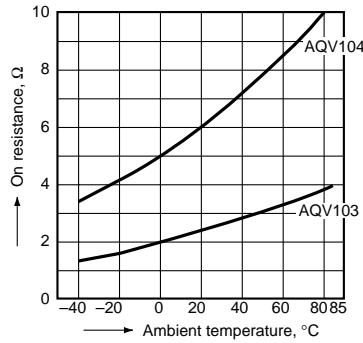


### 2.-3) On resistance vs. ambient temperature characteristics (AC/DC type: AQV201, AQV202)

Measured portion: between terminals 4 and 6;  
LED current: 10 mA;  
Continuous load current: Max. (DC)

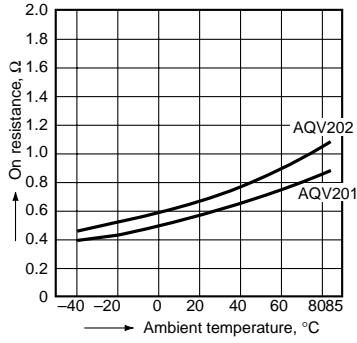


### 2.-4) On resistance vs. ambient temperature characteristics (AC/DC type: AQV203, AQV204)

Measured portion: between terminals 4 and 6;  
LED current: 10 mA;  
Continuous load current: Max. (DC)

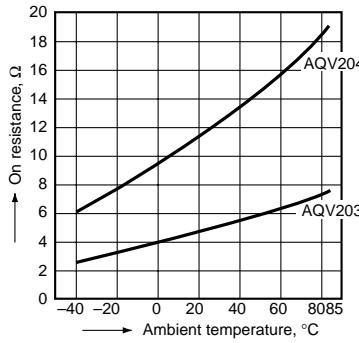


### 3.-1) Turn on time vs. ambient temperature characteristics (DC type)

LED current: 10 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

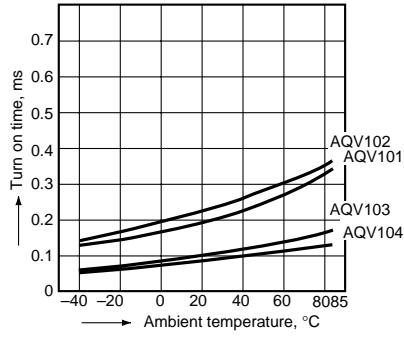


### 3.-2) Turn on time vs. ambient temperature characteristics (AC/DC type)

LED current: 10 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

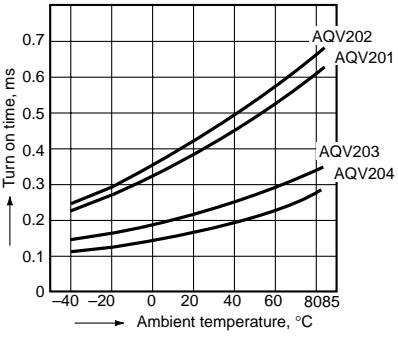


### 4.-1) Turn off time vs. ambient temperature characteristics (DC type)

LED current: 10 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

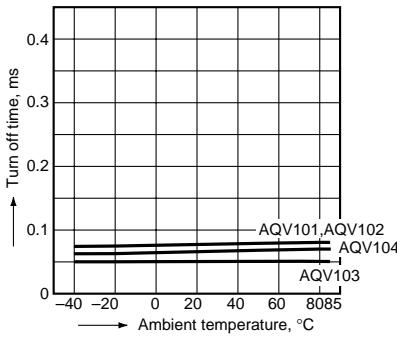


### 4.-2) Turn off time vs. ambient temperature characteristics (AC/DC type)

LED current: 10 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

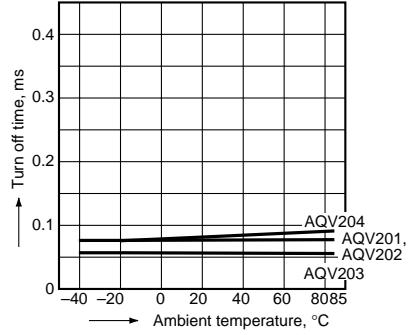


### 5.-1) LED operate/turn off current vs. ambient temperature characteristics (DC type)

Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

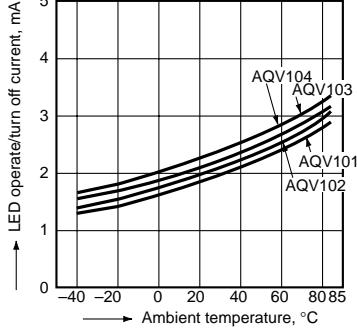


### 5.-2) LED operate/turn off current vs. ambient temperature characteristics (AC/DC type)

Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

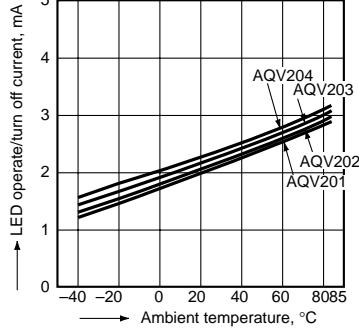


6. LED dropout voltage vs. ambient temperature characteristics  
Sample: AQV202  
LED current: 10 to 50 mA

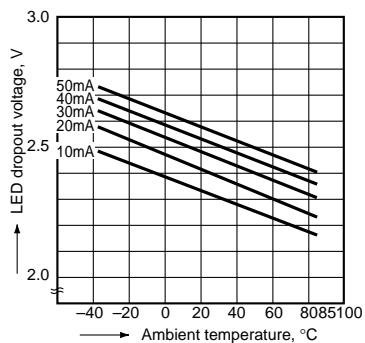


## 8. Off state leakage current

Sample: AQV204;  
Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F

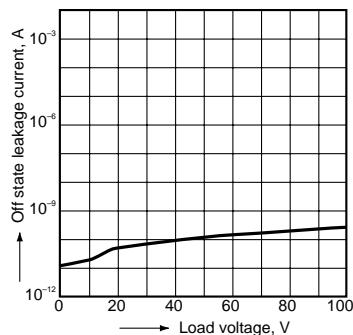


## 10.-1) LED forward current vs. turn off time characteristics (DC type)

Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

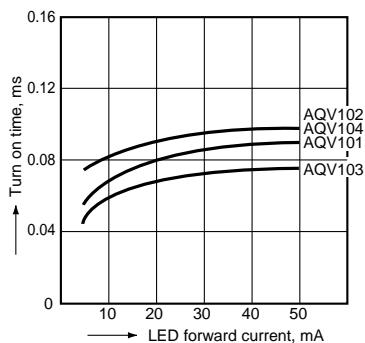


## 11.-1) Applied voltage vs. output capacitance characteristics (AC/DC type)


Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F



7.-1) Voltage vs. current characteristics of output at MOS portion (DC type)  
Ambient temperature: 25°C 77°F




7.-2) Voltage vs. current characteristics of output at MOS portion (AC/DC type)  
Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F




## 9.-1) LED forward current vs. turn on time characteristics (DC type)

Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

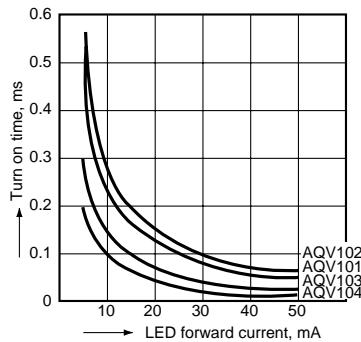

## 9.-2) LED forward current vs. turn on time characteristics (AC/DC type)

Measured portion: between terminals 4 and 6;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

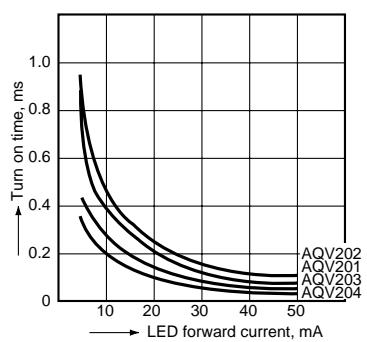

## 11.-2) Applied voltage vs. output capacitance characteristics (DC type)

Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

