


NAiS

**RF (Radio Frequency) Type
[1-Channel (Form A) Type]
—Low On resistance—**

PhotoMOS RELAYS

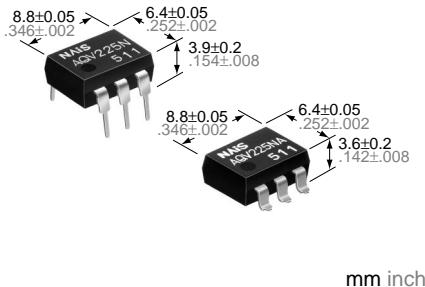

FEATURES

1. PhotoMOS relay with high response speed, low leakage current and low On resistance

2. Low capacitance between output terminals ensures high response speed:

The capacitance between output terminals is small, typically 10 pF. This enables for a fast operation speed of 200 µs.

3. High sensitivity and low On resistance

Maximum 0.3 A of load current can be controlled with input current of 5 mA. The 10 Ω (AQV225N) On resistance is less than our conventional models. With no metallic contacts, the PhotoMOS relay has stable switching characteristics.

4. Low-level off state leakage current

The SSR has an off state leakage current of several milliamperes, whereas the PhotoMOS relay has only 30 pA even with the rated load voltage of 80 V (AQV225N).

5. Controls low-level analog signals

PhotoMOS relay features extremely low closed-circuit offset voltages to enable control of small analog signals without distortion.

6. Low terminals electromotive force (approx. 1 µV)

TYPICAL APPLICATIONS

- Measuring devices
- Scanner, IC checker, Board tester

TYPES

Type	Output rating*		Part No.				Packing quantity
			Through hole terminal		Surface-mount terminal		
	Load voltage	Load current	Tube packing style		Tape and reel packing style		
AC/DC type			Picked from the 1/2/3-pin side		Picked from the 4/5/6-pin side		1 tube contains 50 pcs. 1 batch contains 500 pcs.
80 V	150 mA	AQV225N	AQV225NA	AQV225NAX	AQV225NAZ		
200 V	70 mA	AQV227N	AQV227NA	AQV227NAX	AQV227NAZ		
	400 V	50 mA	AQV224N	AQV224NA	AQV224NAX	AQV224NAZ	1,000 pcs.

*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV225N(A)	AQV227N(A)	AQV224N(A)	Remarks			
Input	LED forward current	I _F		50 mA						
	LED reverse voltage	V _R		3 V						
	Peak forward current	I _{FP}		1 A			f = 100 Hz, Duty factor = 0.1%			
	Power dissipation	P _{in}		75 mW						
Output	Load voltage (peak AC)	V _L		80 V	200 V	400 V				
	Continuous load current			A	0.15 A	0.07 A	A connection: Peak AC, DC B, C connection: DC			
				B	0.20 A	0.08 A				
				C	0.30 A	0.10 A				
	Peak load current	I _{peak}		0.45 A	0.21 A	0.15 A	A connection: 100 ms (1 shot), V _L = DC			
	Power dissipation	P _{out}		360 mW						
Total power dissipation		P _T	410 mW							
I/O isolation voltage		V _{iso}	1,500 V AC							
Temperature limits	Operating	T _{opr}	−40°C to +85°C −40°F to +185°F							
	Storage	T _{stg}	−40°C to +100°C −40°F to +212°F							


AQV22ON

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	Type of connection	AQV225N(A)	AQV227N(A)	AQV224N(A)	Remarks
Input	LED operate current	Typical	I_{Fon}	—	0.90 mA			$I_L = \text{Max.}$
		Maximum			3.0 mA			
	LED turn off current	Minimum	I_{Foff}	—	0.4 mA			$I_L = \text{Max.}$
		Typical			0.85 mA			
Output	LED dropout voltage	Typical	V_F	—	1.14 V (1.25 V at $I_F = 50$ mA)			$I_F = 5$ mA
		Maximum			1.5 V			
	On resistance	Typical	R_{on}	A	7.0 Ω	30 Ω	70 Ω	$I_F = 5$ mA $I_L = \text{Max.}$ Within 1 s on time
		Maximum			10 Ω	50 Ω	100 Ω	
		Typical	R_{on}	B	3.5 Ω	16 Ω	55 Ω	$I_F = 5$ mA $I_L = \text{Max.}$ Within 1 s on time
		Maximum			5 Ω	25 Ω	70 Ω	
	Output capacitance	Typical	C_{out}	—	1.8 Ω	8 Ω	28 Ω	$I_F = 0$ $V_B = 0$ $f = 1$ MHz
		Maximum			2.5 Ω	12.5 Ω	35 Ω	
	Off state leakage current	Typical	I_{Leak}	—	30 pA	30 pA	90 pA	$I_F = 0$ $V_L = \text{Max.}$
		Maximum			10 nA			
Transfer characteristics	Switching speed	Turn on time*	T_{on}	—	0.20 ms			$I_F = 5$ mA $I_L = \text{Max.}$
		Maximum			0.5 ms			
	Turn off time*	Typical	T_{off}	—	0.08 ms			$I_F = 5$ mA $I_L = \text{Max.}$
		Maximum			0.2 ms			
	I/O capacitance		C_{iso}	—	0.8 pF			$f = 1$ MHz $V_B = 0$
	Initial I/O isolation resistance				1.5 pF			
	Minimum		R_{iso}	—	1,000 MΩ			500 V DC

Note: Recommendable LED forward current $I_F = 5$ mA

*Turn on/Turn off time

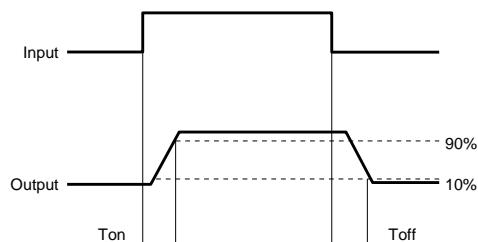


- For Dimensions, see Page 441.
- For Schematic and Wiring Diagrams, see Page 444.
- For Cautions for Use, see Page 449.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to $+85^\circ\text{C}$
 -40°F to $+185^\circ\text{F}$

Type of connection: A

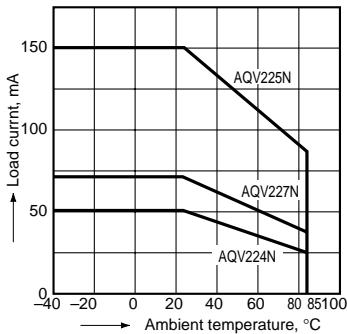


2.-1) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
 LED current: 5 mA; Load voltage: Max. (DC);
 Continuous load current: Max. (DC)

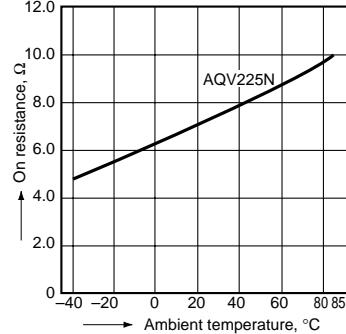


2.-2) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
 LED current: 5 mA; Load voltage: Max. (DC);
 Continuous load current: Max. (DC)

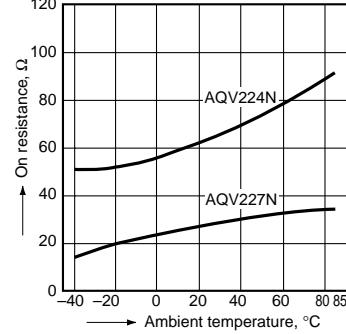


3. Turn on time vs. ambient temperature characteristics

Sample: AQV225N, AQV227N, AQV224N;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

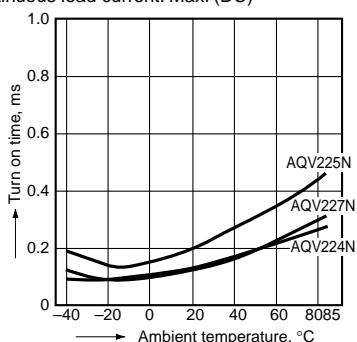


4. Turn off time vs. ambient temperature characteristics

Sample: AQV225N, AQV227N, AQV224N;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

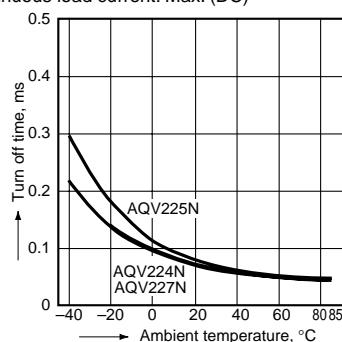


5. LED operate current vs. ambient temperature characteristics

Sample: AQV225N, AQV227N, AQV224N;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

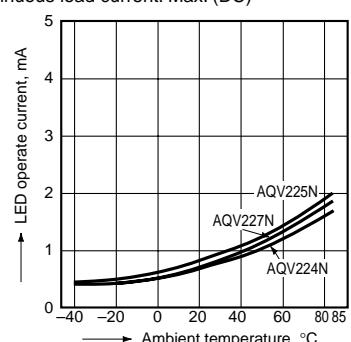


6. LED turn off current vs. ambient temperature characteristics

Sample: AQV225N, AQV227N, AQV224N;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

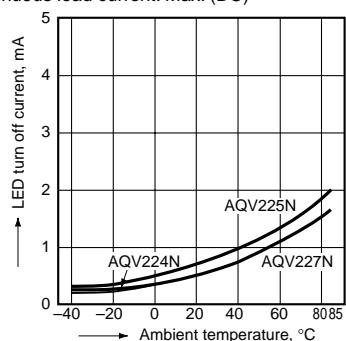


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;
LED current: 5 to 50 mA

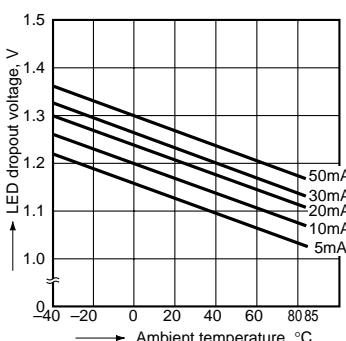


8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

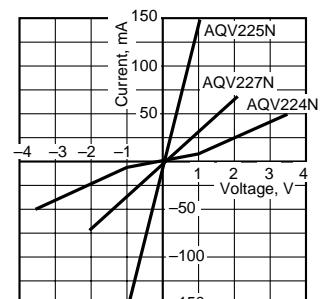


9. Off state leakage current

Sample: AQV225N, AQV227N, AQV224N;
Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

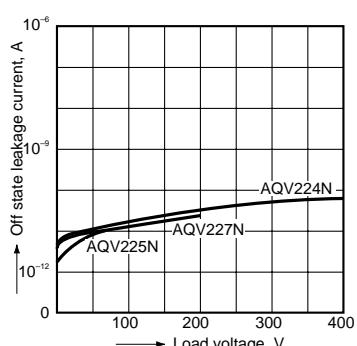


10. LED forward current vs. turn on time characteristics

Sample: AQV225N, AQV227N, AQV224N;
Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

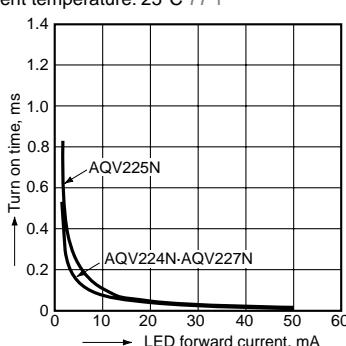


11. LED forward current vs. turn off time characteristics

Sample: AQV225N, AQV227N, AQV224N;
Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

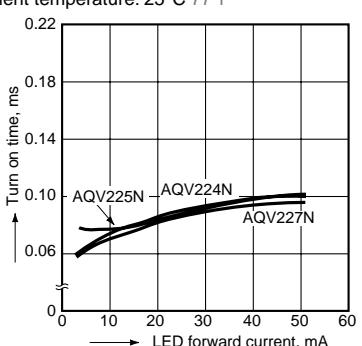


12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz, 30 mVrms;
Ambient temperature: 25°C 77°F

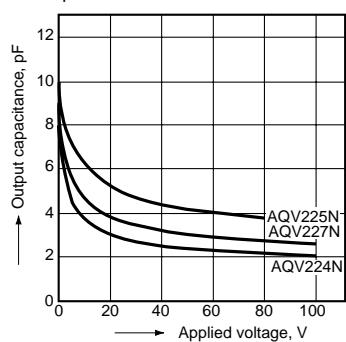

13. Isolation characteristics

(50 Ω impedance)
Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

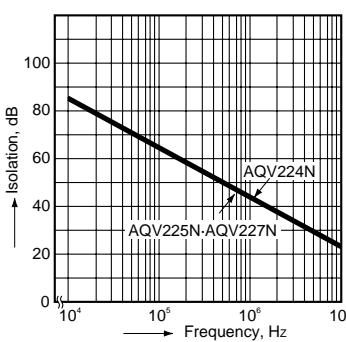

14. Insertion loss characteristics

(50 Ω impedance)
Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

