


NAIS

**HS (High Sensitivity) Type
[1-Channel (Form A) Type]**

PhotoMOS RELAYS

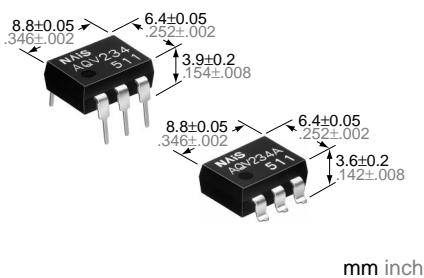

FEATURES

1. **High sensitivity type**
LED operate current: typical 0.31 mA
2. **Low-level off state leakage current (Typical 1 µA at 400 V load voltage)**
3. **Eliminates the need for a power supply to drive the power MOSFET**
4. **Low thermal electromotive force (Approx. 1 µV)**
5. **Extremely low closed-circuit offset voltages to enable control of small analog signals without distortion**
6. **Eliminates the need for a counter electromotive force protection diode in the drive circuits on the input side**

7. **Stable on resistance to help simplify circuit design**
8. **Surface-mount model available**

TYPICAL APPLICATIONS

1. **High-speed inspection machines**
 - Scanner
 - IC checker
 - Board tester
2. **Telephone and data communication equipment**

TYPES

Type	Output rating*		Part No.			Packing quantity		
			Through hole terminal	Surface-mount terminal				
	Load voltage	Load current	Tube packing style	Tape and reel packing style	Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side	Tube	Tape and reel
AC/DC type	400 V	120 mA	AQV234	AQV234A	AQV234AX	AQV234AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs.

*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV234(A)	Remarks	
Input	LED forward current	I _F	A	50 mA		
	LED reverse voltage	V _R		3 V		
	Peak forward current	I _{FP}		1 A	f = 100 Hz, Duty factor = 0.1%	
	Power dissipation	P _{in}		75 mW		
Output	Load voltage (Peak AC)	V _L	A	400 V		
	Continuous load current	I _L		0.12 A		
				0.13 A	A connection: Peak AC, DC B, C connection: DC	
	Peak load current	I _{peak}	C	0.15 A		
	Power dissipation	P _{out}		0.3 A	A connection: 100 ms (1 shot), V _L = DC	
Total power dissipation		P _T		500 mW		
I/O isolation voltage		V _{iso}		1,500 V AC		
Temperature limits	Operating	T _{opr}		-40°C to +85°C -40°F to +185°F	Non-condensing at low temperature	
	Storage	T _{stg}		-40°C to +100°C -40°F to +212°F		


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	Type of connection	AQV234(A)	Remarks
Input	LED operate current	Typical	I_{Fon}	—	0.31 mA	$\Delta I_F/\Delta t \geq \text{Min. } 100 \mu\text{A/s}$ $I_L = 120 \text{ mA}$
		Maximum			0.5 mA	
	LED turn off current	Minimum	I_{Foff}	—	0.1 mA	$\Delta I_F/\Delta t \geq \text{Min. } 100 \mu\text{A/s}$ $I_L = 120 \text{ mA}$
		Typical			0.29 mA	
Output	LED dropout voltage	Typical	V_F	—	1.1 V (1.25 V at $I_F = 50 \text{ mA}$)	$I_F = 2 \text{ mA}$
		Maximum			1.5 V	
	On resistance	Typical	R_{on}	A	30 Ω	$I_F = 2 \text{ mA}$ $I_L = 120 \text{ mA}$ Within 1 s on time
		Maximum			50 Ω	
	Off state leakage current	Typical	R_{on}	B	22.5 Ω	$I_F = 2 \text{ mA}$ $I_L = 120 \text{ mA}$ Within 1 s on time
		Maximum			25 Ω	
	Switching speed	Typical	T_{on}	C	11.3 Ω	$I_F = 2 \text{ mA}$ $I_L = 120 \text{ mA}$ Within 1 s on time
		Maximum			12.5 Ω	
Transistor characteristics	Turn on time*		T_{on}	—	1 μA	$I_F = 0$ $V_L = 400 \text{ V}$
	Turn off time*	Typical			0.89 ms	
		Maximum			2 ms	$I_F = 2 \text{ mA}$ $I_L = 120 \text{ mA}$
	I/O capacitance	Typical	T_{off}	—	0.22 ms	
		Maximum			1 ms	
	Initial I/O isolation resistance	Minimum	R_{iso}	—	0.8 pF	$f = 1 \text{ MHz}$
					1.5 pF	$V_B = 0$
					1,000 MΩ	500 V DC

Note: Recommendable LED forward current $I_F = 2 \text{ mA}$.

For type of connection, see Page 444.

*Turn on/Turn off time

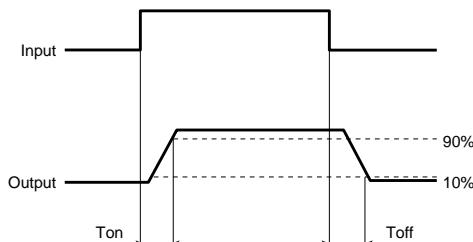


- For Dimensions, see Page 440.
- For Schematic and Wiring Diagrams, see Page 444.
- For Cautions for Use, see Page 449.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to $+85^\circ\text{C}$
 -40°F to $+185^\circ\text{F}$


Type of connection: A



2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 2 mA; Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)


3. Turn on time vs. ambient temperature characteristics

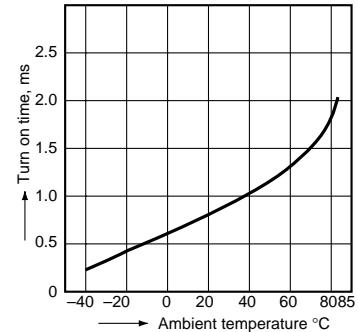LED current: 2 mA;
Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

AQV234


4. Turn off time vs. ambient temperature characteristics

LED current: 2 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)




5. LED operate current vs. ambient temperature characteristics

Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)




6. LED turn off current vs. ambient temperature characteristics

Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)




7. LED dropout voltage vs. ambient temperature characteristics

LED current: 2 to 50 mA




8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F




9. Off state leakage current

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

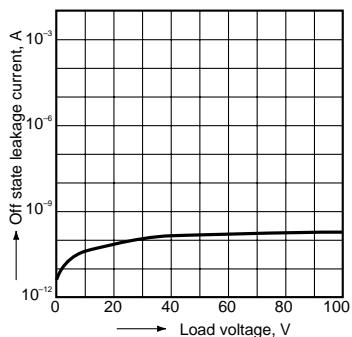


10. LED forward current vs. turn on time characteristics

Measured portion: between terminals 4 and 6; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F



11. LED forward current vs. turn off time characteristics

Measured portion: between terminals 4 and 6; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F



12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 4 and 6; Frequency: 1 MHz; Ambient temperature: 25°C 77°F

