


NAiS

**HE (High-function Economy)
Type [2-Channel (Form A
Form B) Type]**

PhotoMOS RELAYS

FEATURES

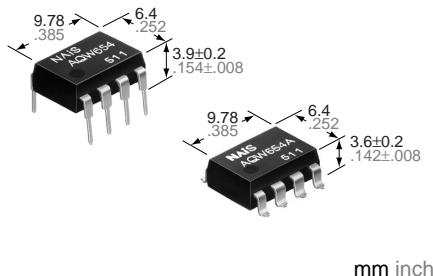

1. Compact 8-pin DIP size

The device comes in a compact (W) 6.4×(L) 9.78×(H) 3.9 mm (W) .252×(L) .385×(H) .154 inch, 8-pin DIP size (through hole terminal type).

2. Applicable for 1 Form A 1 Form B use as well as two independent 1 Form A and 1 Form B use

3. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

4. High sensitivity, low ON resistance

Can control a maximum 0.16 A (AQW654) load current with a 5 mA input current. Low ON resistance of 16 Ω (AQW654). Stable operation because there are no metallic contact parts.

5. Low-level off state leakage current

The SSR has an off state leakage current of several milliamperes, whereas the PhotoMOS relay has only 100 pA even with the rated load voltage of 400 V (AQW654).

6. Low thermal electromotive force (Approx. 1 μV)

TYPICAL APPLICATIONS

- High-speed inspection machines
- Data communication equipment
- Telephone equipment

TYPES

Type	Output rating*		Part No.			Packing quantity	
			Through hole terminal	Surface-mount terminal			
	Load voltage	Load current	Tube packing style	Tape and reel packing style		Tube	Tape and reel
				Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side		
AC/DC	400 V	120 mA	AQW654	AQW654A	AQW654AX	AQW654AZ	1 tube contains 40 pcs. 1 batch contains 400 pcs.
							1,000 pcs

*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQW654(A)	Remarks
Input	LED forward current	I _F	50 mA	
	LED reverse voltage	V _R	3 V	
	Peak forward current	I _{FP}	1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75 mW	
Output	Load voltage (peak AC)	V _L	400 V	
	Continuous load current	I _L	0.12A (0.16 A)	Peak AC, DC (): in case of using only 1 channel)
	Peak load current	I _{peak}	0.36 A	A connection: 100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}	800 mW	
Total power dissipation		P _T	850 mW	
I/O isolation voltage		V _{iso}	1,500 V AC	Between input and output/between contact sets
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F	

AQW654

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQW654(A)	Remarks
Input	LED operate (OFF) current		Typical Maximum	I_{Fon} (N.O.) I_{Foff} (N.C.)	0.9 mA 3 mA
	LED reverse (ON) current		Minimum Typical	I_{Forff} (N.O.) I_{Fon} (N.C.)	0.4 mA 0.8 mA
	LED dropout voltage		Typical Maximum	V_F	1.14 V (1.25 V at $I_F = 50$ mA) 1.5 V
					$I_F = 5$ mA
Output	On resistance		Typical Maximum	R_{on}	10 Ω (N.O.) 11 Ω (N.C.) 16 Ω (N.O.) 16 Ω (N.C.)
	Off state leakage current		Maximum		I_{Leak} 1 μA
					$I_F = 0$ mA (N.O.) $I_F = 5$ mA (N.C.) $V_L = 400$ V
Transfer characteristics	Switching speed	Operate (OFF) time*	Typical Maximum	T_{on} (N.O.) T_{off} (N.C.)	0.8 ms (N.O.) 1.2 ms (N.C.) 2 ms
		Reverse (ON) time*	Typical Maximum	T_{off} (N.O.) T_{on} (N.C.)	0.04 ms (N.O.) 0.36 ms (N.C.) 1 ms
	I/O capacitance		Typical Maximum	C_{iso}	0.8 pF 1.5 pF
	Initial I/O isolation resistance		Minimum		R_{iso} 1,000 MΩ
Note: Recommendable LED forward current $I_F = 5$ mA.					

*Operate/Reverse time

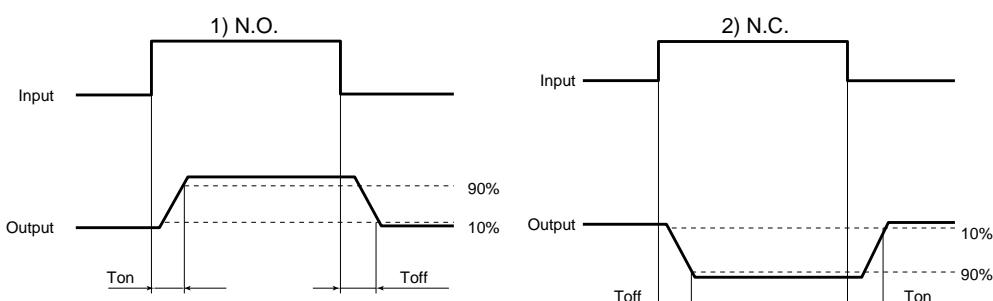


- For Dimensions, see Page 440.
- For Schematic and Wiring Diagrams, see Page 445.
- For Cautions for Use, see Page 449.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

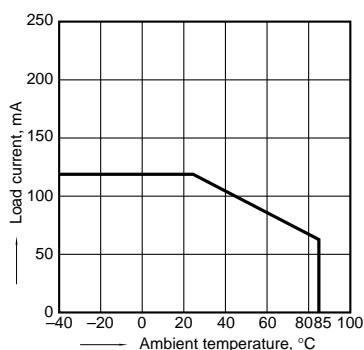


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

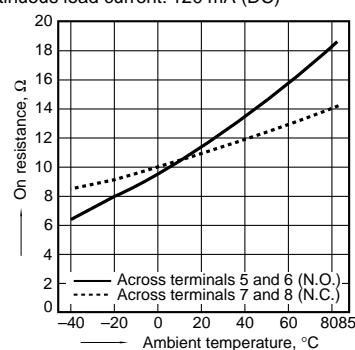


3. Operate (OFF) time vs. ambient temperature characteristics


LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

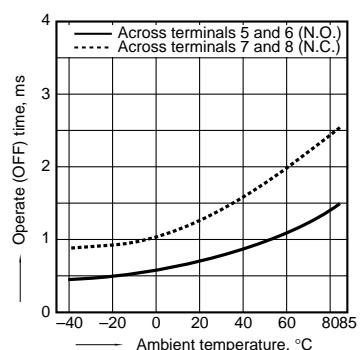


4. Reverse (ON) time vs. ambient temperature characteristics
 LED current: 5 mA;
 Load voltage: 400 V (DC);
 Continuous load current: 120 mA (DC)

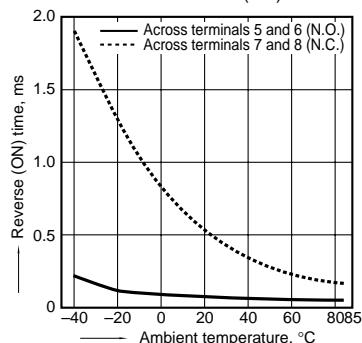


7. LED dropout voltage vs. ambient temperature characteristics
 LED current: 5 to 50 mA

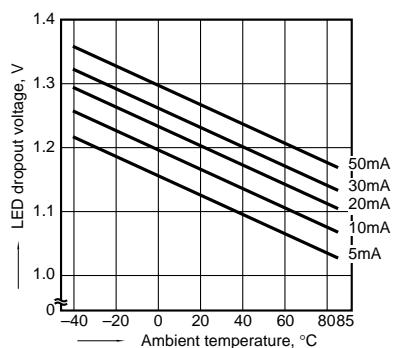


10. LED forward current vs. operate (OFF) time characteristics
 Measured portion: between terminals 5 and 6, 7 and 8;
 Load voltage: 400 V (DC); Continuous load current:
 120 mA (DC); Ambient temperature: 25°C 77°F

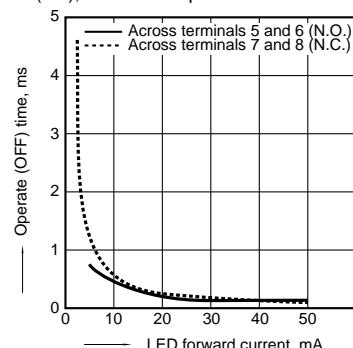


5. LED operate (OFF) current vs. ambient temperature characteristics
 Load voltage: 400 V (DC);
 Continuous load current: 120 mA (DC)

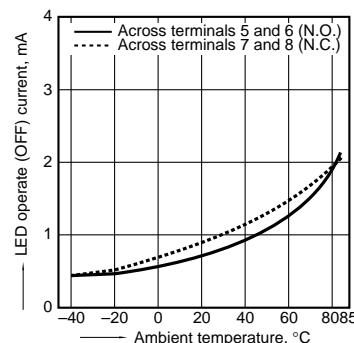


6. LED reverse (ON) current vs. ambient temperature characteristics
 Load voltage: 400 V (DC);
 Continuous load current: 120 mA (DC)

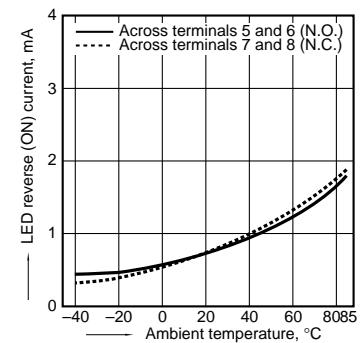

8. Voltage vs. current characteristics of output at MOS portion
 Measured portion: between terminals 5 and 6,
 7 and 8; Ambient temperature: 25°C 77°F




9. Off state leakage current
 Measured portion: between terminals 5 and 6,
 7 and 8; Ambient temperature: 25°C 77°F

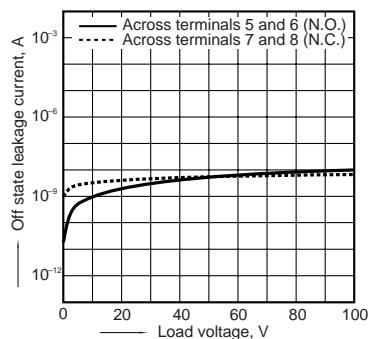

11. LED forward current vs. reverse (ON) time characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
 Load voltage: 400 V (DC); Continuous load current:
 120 mA (DC); Ambient temperature: 25°C 77°F

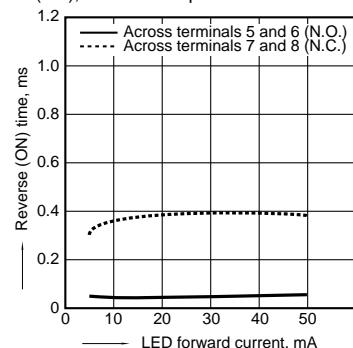

12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
 Frequency: 1 MHz;
 Ambient temperature: 25°C 77°F

