


NAIS

SMALL SIZED POWER RELAY

JZ-RELAYS

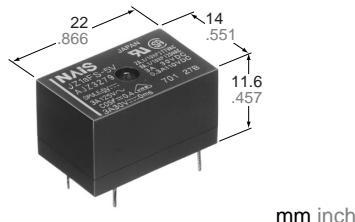

FEATURES

- Small sized flat type: 22×14×11.6 mm .866×.551×.457 inch
- High dielectric withstand: 10,000 V surge in ms between coil and contact
- High electrical noise immunity
- High sensitivity type available
- VDE, TÜV, SEMKO also approved

SPECIFICATIONS

Contact

Type	Standard type	High sensitivity type	Standard TV-5 type	TV-5 High sensitivity type
Arrangement	1 Form A			
Contact material	Silver alloy			
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)	100 mΩ			
Rating (resistive)	Nominal switching capacity	5 A 125 V AC 5 A 30 V DC	3 A 125 V AC 3 A 30 V DC	8 A 125 V AC 5 A 30 V DC
	Max. switching power	150 W, 750 VA	90 W, 500 VA	150 W, 1,250 VA
	Max. switching voltage	250 V AC, 110 V DC (0.3 A)		
	Max. switching current	5 A	3 A	8 A
Expected life (min. operations)	Mechanical (at 180 cpm)	5 × 10 ⁶		
	Electrical (at 20 cpm)	10 ⁵ (at nominal operating capacity)	2 × 10 ⁵ (3 A 125 V AC) 10 ⁵ (3 A 30 V DC)	10 ⁵ (at nominal operating capacity) 5 × 10 ⁴ (8 A 125 V AC) 10 ⁵ (5 A 30 V DC)

Coil (at 20°C 68°F)

Standard type	Nominal operating power	400 mW
High sensitivity type	Nominal operating power	200 mW

Remarks

- * Specifications will vary with foreign standards certification ratings.
- *¹ Measurement at same location as "Initial breakdown voltage" section
- *² Detection current: 10mA
- *³ Wave is standard shock voltage of ±1.2 × 50μs according to JEC-212-1981
- *⁴ Excluding contact bounce time
- *⁵ Half-wave pulse of sine wave: 11ms; detection time: 10μs
- *⁶ Half-wave pulse of sine wave: 6ms
- *⁷ Detection time: 10μs
- *⁸ Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 61).

Characteristics

(at 25°C 77°F, 50% Relative humidity)

Max. operating speed	20 cpm
Initial insulation resistance* ¹	Min. 100 MΩ at 500 V DC
Initial breakdown voltage* ²	750 Vrms for 1 min.
Between contacts and coil	2,000 Vrms for 1 min.
Surge voltage between contact and coil* ³	Min. 10,000 V
Operate time* ⁴ (at nominal voltage)	Approx. 4 ms
Release time* ⁴ (without diode) (at nominal voltage)	Approx. 2 ms
Temperature rise (ambient temperature at 70°C)	Max. 45°C at max. switching current
Shock resistance	Functional* ⁵ Destroyer* ⁶
Functional	Min. 98 m/s ² {10 G}
Destroyer	Min. 980 m/s ² {100 G}
Vibration resistance	Functional* ⁷ Destroyer
Functional	98 m/s ² {10 G}, 10 to 55 Hz at double amplitude of 1.6 mm
Destroyer	117.6 m/s ² {12 G}, 10 to 55 Hz at double amplitude of 2 mm
Conditions for operation, transport and storage* ⁸ (Not freezing and condens- ing at low temperature)	Ambient temp.
	-40°C to +70°C -40°F to +158°F
Humidity	5 to 85% R.H.
Unit weight	Approx. 7 g .25 oz

TYPICAL APPLICATIONS ORDERING INFORMATION

- Microwave oven (fan, inside lamp)
- Machineries which need electrical noise resistance and surge resistance, (Ex. hot-water heater)

Ex. JZ	1a	F	S	—	9 V	—	TV
Contact arrangement	Protective construction	Type classification	Coil voltage (DC)	Type classification			
1a: 1 Form A	F: Flux-resistant type	Nil: Standard (400 mW) S: High sensitivity (200 mW)	5, 6, 9, 12, 18, 24 V	Nil: UL/CSA/VDE recognized type TV: TV-5 rated type			

Note: Standard packing Carton: 100 pcs. Case: 500 pcs.
UL/CSA, TV-5 (only for TV type) approved type is standard.

TYPES AND COIL DATA (at 20°C 68°F)

1) Standard type


Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Coil resistance, Ω (±10%)	Nominal operating current, mA	Nominal operating power, mW	Max. allowable voltage, at 70°C, V DC
JZ1aF-5V	5	3.5	0.25	62.5	80	400	5.5
JZ1aF-6V	6	4.2	0.3	90	67	400	6.6
JZ1aF-9V	9	6.3	0.45	202	45	400	9.9
JZ1aF-12V	12	8.4	0.6	360	33	400	13.2
JZ1aF-18V	28	12.6	0.9	810	22	400	19.8
JZ1aF-24V	24	16.8	1.2	1,440	17	400	26.4

2) High sensitivity type


Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Coil resistance, Ω (±10%)	Nominal operating current, mA	Nominal operating power, mW	Max. allowable voltage, at 70°C, V DC
JZ1aFS-5V	5	4	0.25	125	40	200	6.5
JZ1aFS-6V	6	4.8	0.3	180	33	200	7.8
JZ1aFS-9V	9	7.2	0.45	405	22	200	11.7
JZ1aFS-12V	12	9.6	0.6	720	17	200	15.6
JZ1aFS-18V	18	14.4	0.9	1,620	11	200	23.4
JZ1aFS-24V	24	19.2	1.2	2,880	8.3	200	31.2

DIMENSIONS

mm inch

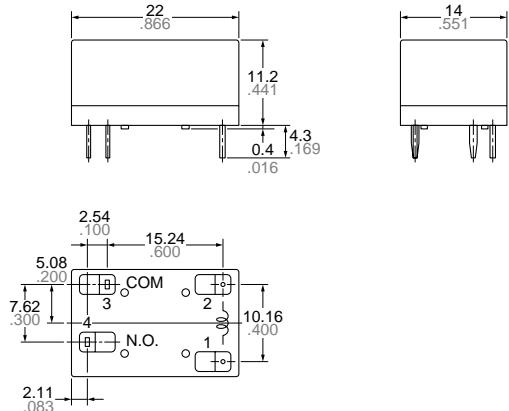

PC board pattern (Copper-side view)




Tolerance: $\pm 0.1 \pm .004$


REFERENCE DATA

• Not TV-5 rated type


1. Max. switching power
(AC resistive load)

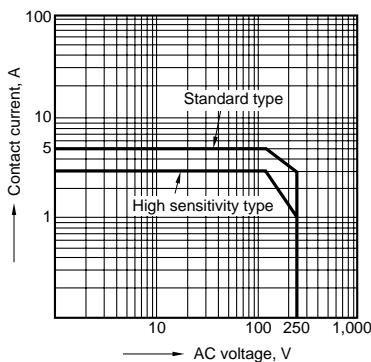


2.-1) Operate/Release time
(Standard type)

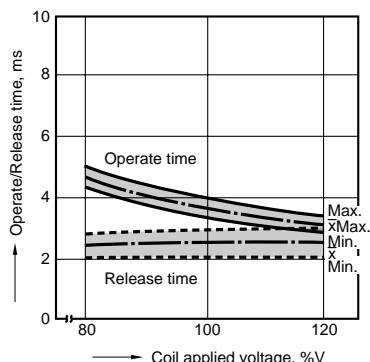


2.-2) Operate/Release time
(High sensitivity type)

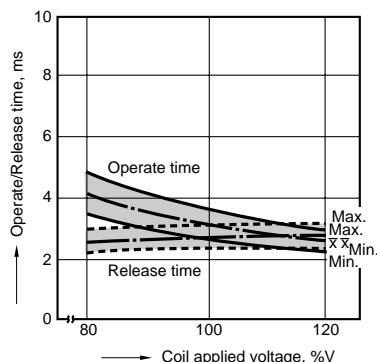


3. Coil temperature rise
Point measured: Coil inside
Contact current: 3 A

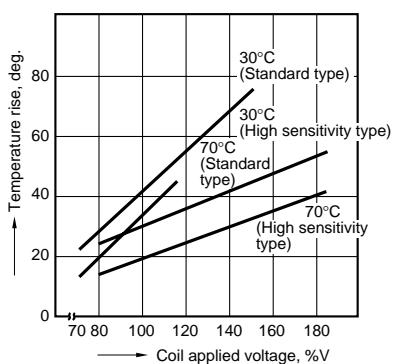

4-(1) Ambient temperature vs. coil applied voltage (Standard type)
Contact current: 1 A

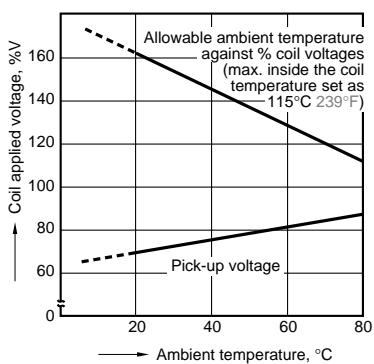


4-(2) Ambient temperature vs. coil applied voltage (High sensitivity type)
Contact current: 1 A

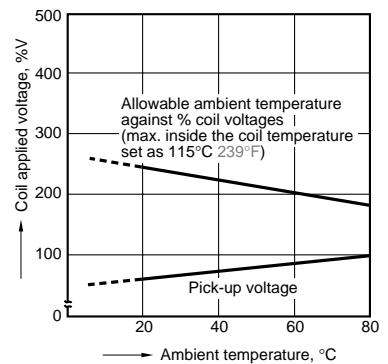


5. Electrical life (load test: fan motor, turntable motor and inside lamp of microwave oven)

Tested sample: JZ1aFS-24V, 6 pcs.
Load: 100 V AC 0.5 A; Rush current: 2.5 A
Operation frequency: 4 times/min.
(ON:OFF = 3s:12s)
With coil diode protection
Ambient temperature: 70°C 158°F


Circuit



Change of pick-up and drop-out voltage

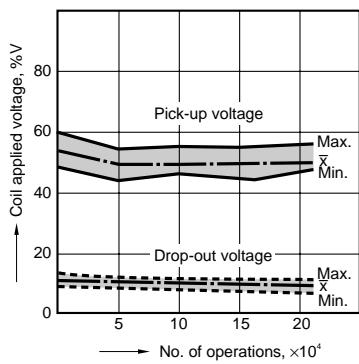


Change of contact resistance

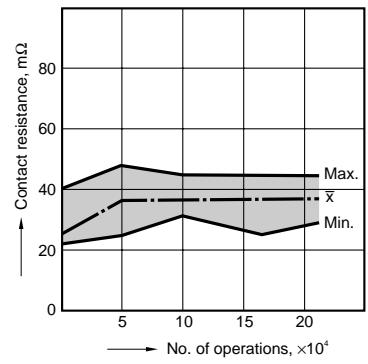


6. Noise resistance

Tested sample: JZ1aFS-24V


Circuit

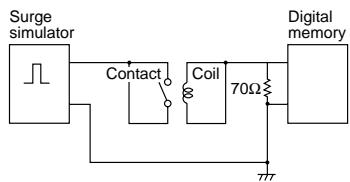

Noise wave form
(Applied voltage wave form to the contact)

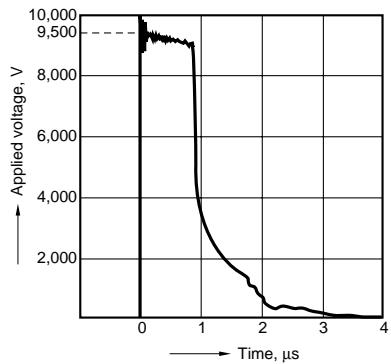


Output wave form
(Output wave form on the coil side)

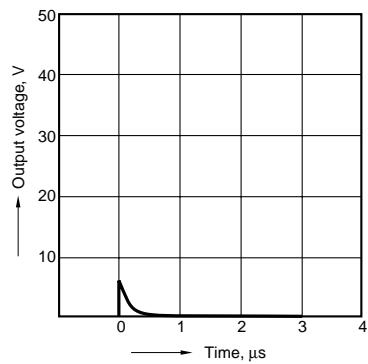


•TV-5 rated type

1. Max. switching power

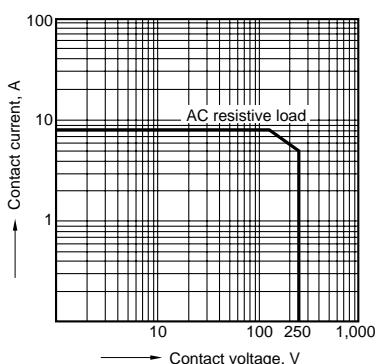


2-(1). Operate/Release time
(Standard type)

Sample: JZ1aF-12V-TV

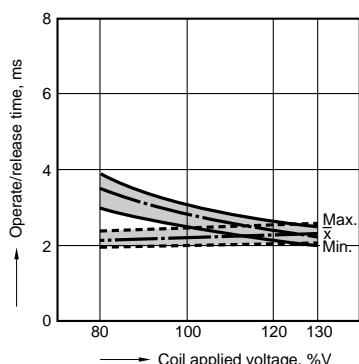

2-(2). Operate/Release time
(High sensitivity type)

Sample: JZ1aFS-12V-TV

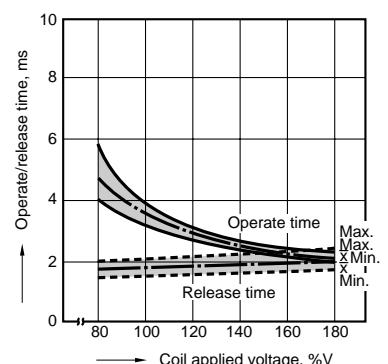


3-(1). Coil temperature rise (Standard type)

Sample: JZ1aF-12V-TV

Point measured: Coil inside

Contact current: 8 A

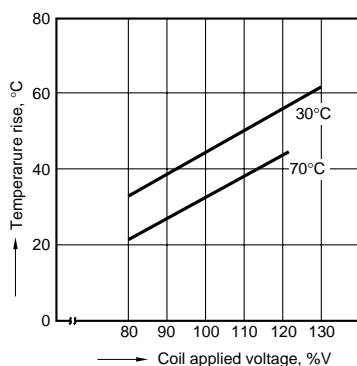


3-(2). Coil temperature rise (High sensitivity type)

Sample: JZ1aFS-12V-TV


Point measured: Coil inside

Contact current: 5 A

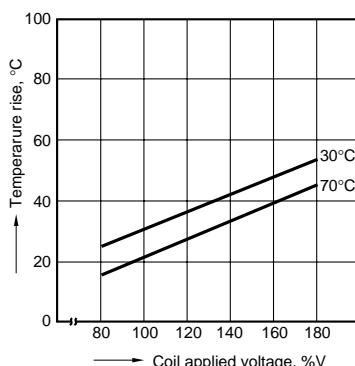

4-(1). Ambient temperature vs. coil applied voltage (Standard type)


Sample: JZ1aF-12V-TV

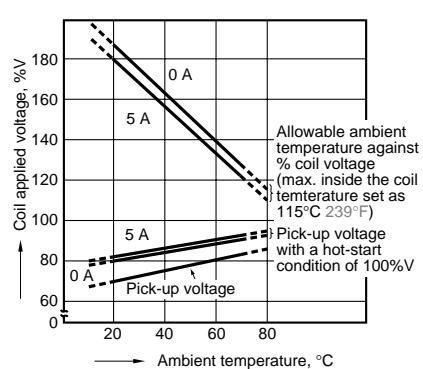

4-(2). Ambient temperature vs. coil applied voltage (High sensitivity type)

Sample: JZ1aFS-12V-TV

Contact current: 5 A

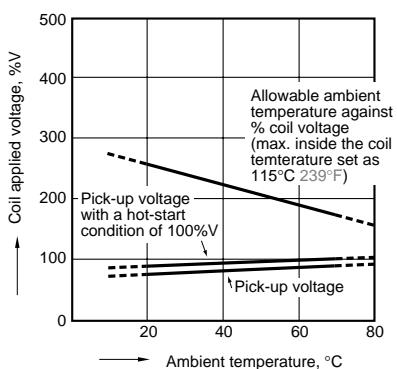


5-(1). Electrical life test (TV-5)

Tested sample: JZ1aF-12V-TV, 6 pcs.


UL Lamp load test

	Overload	Endurance
Voltage	AC 120 V	AC 120 V
Switching frequency	60 Hz	60 Hz
Current	Inrush: 111 A; Steady: 7.5 A	Inrush: 78 A; Steady: 5.0 A
Operating speed	10 cpm (ON:OFF = 1s:5s)	10 cpm (ON:OFF = 1s:5s)
No. of operations	50 ope.	25,000 ope.

Change of pick-up and drop-out voltage

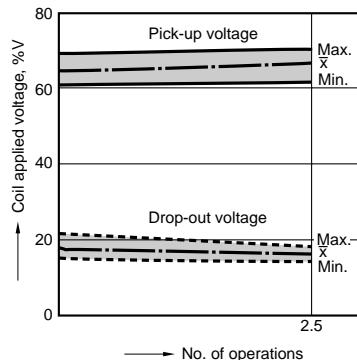

Change of contact resistance

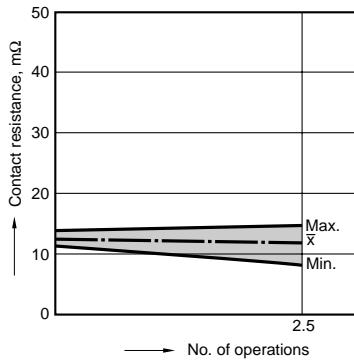

5-(2). Electrical life test (Condenser load)

Tested sample: JZ1aF-12V-TV, 6 pcs.


Load: DC 17 V 6.4 A, Inrush max. 139 A

Operating speed: 20 cpm


(ON:OFF = 1 s:2 s)

Ambient temperature: 27°C 81°F


Circuit:



Change of pick-up and drop-out voltage

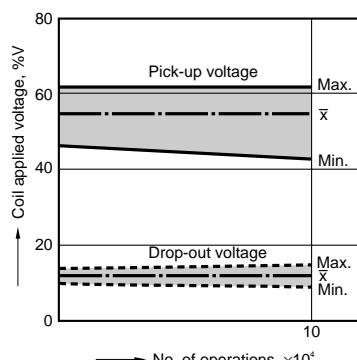

Change of contact resistance

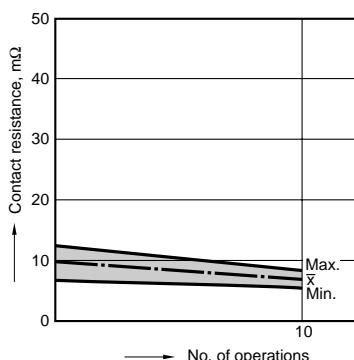

5-(3). Electrical life test (TV power source)

Tested sample: JZ1aF-12V-TV, 10 pcs.

Load: AC 100 V TV power source


Inrush: 100 A max.; Steady: 5.0 A

Operating speed: 20 cpm


(ON:OFF = 1 s:2 s)

Ambient temperature: 40°C 104°F 95% R.H.


Circuit:

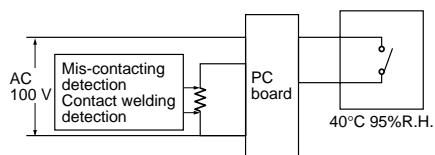

Change of pick-up and drop-out voltage

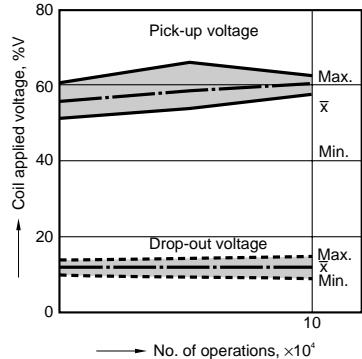

Change of contact resistance

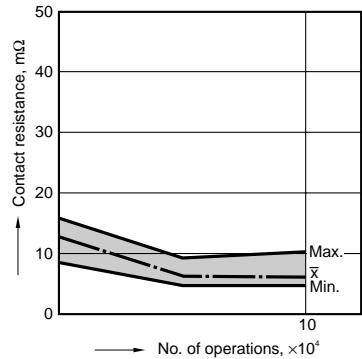

For Cautions for Use, see Relay Technical Information (Page 48 to 76).