


SILICON BRIDGE RECTIFIERS

REVERSE VOLTAGE - 50 to 1000 Volts
 FORWARD CURRENT - 2.0 Amperes

FEATURES

- Surge overload rating - 60 amperes peak
- Ideal for printed circuit board
- Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- Mounting Position: Any

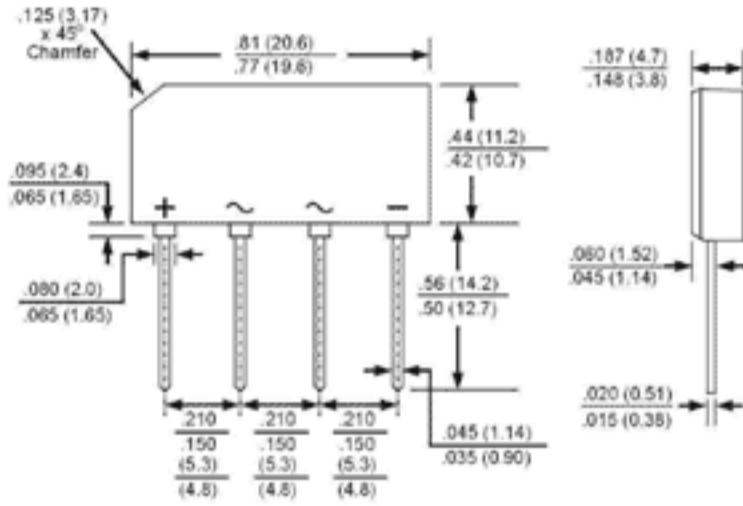

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Resistive or inductive load, 60Hz.

For capacitive load, derate current by 20%

CHARACTERISTICS	KBJ 2A	KBJ 2B	KBJ 2D	KBJ 2G	KBJ 2J	KBJ 2K	KBJ 2M	UNIT
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Output Current @TA=50°C					2.0			A
Peak Forward Surge Current, 8.3ms single half sine-wave super imposed on rated load					60			A
Maximum Forward Voltage Drop per Bridge Element at 2.0A Peak				1.0				V
Maximum Reverse Current at Rated DC Blocking Voltage per Element				10.0				μA
Maximum Reverse Current at Rated DC Blocking Voltage per Element TA=100°C				1.0				mA
Operating Temperature Range TJ				-40 to +125				°C
Storage Temperature Range TA				-40 to +125				°C